



厢式技术参数

TECHNICAL DATA

规格型号 Model	过滤面积(m²)	滤板尺寸(mm)	滤饼厚度(mm)	滤室容积(L) Filter chamber volume	滤板数量(pcs) Plate NO.	过滤压力(Mpa) Filtration pressure	电机功率(Kw) Motor Power	整机质量(Kg) Weight	外形尺寸长×宽×高(mm) Dimensions L×W×H(mm)	地基尺寸(mm) Foundation Size(mm)			
	Filter area	Plate size	Cake thickness							L	B	D	H
X _W Y4/450-30U _K	4	500×500	30	60	9	≥0.6	2.2	860	1950×700×900	1450	390	700	560
X _W Y6/450-30U _K	6			91	14			910	2200×700×900	1700			
X _W Y8/450-30U _K	8			121	19			960	2450×700×900	1950			
X _W Y10/450-30U _K	10			151	24			1010	2700×700×900	2200			
X _W Y12/450-30U _K	12			182	29			1060	2950×700×900	2450			
X _W Y15/450-30U _K	15			225	36			1130	3300×700×900	2800			
X _W Y16/450-30U _K	16			243	39			1160	3450×700×900	2950			
X _W Y15/630-30U _K	15	700×700		226	18	≥0.6	2.2	1725	2640×900×1060	1972	560	910	700
X _W Y20/630-30U _K	20			297	24			1993	2940×900×1060	2272			
X _W Y30/630-30U _K	30			452	37			2360	3590×900×1060	2922			
X _W Y40/630-30U _K	40			595	49			2788	4300×900×1060	3622			
X _W Y30/800-30U _K	30	800×800		460	28	≥0.6	2.2	2170	3700×1200×1160	2880	600	900	780
X _W Y40/800-30U _K	40			595	38			2450	4300×1200×1160	3480			
X _W Y50/800-30U _K	50			749	47			2700	4840×1200×1160	4020			
X _W Y60/800-30U _K	60			902	57			2980	5440×1200×1160	4620			
X _W Y70/800-30U _K	70			1056	67			3250	6040×1200×1160	5220			
X _W Y30/870-30U _K	30	870×870		460	23	≥0.6	2.2	2580	3330×1400×1250	2360	700	1270	785
X _W Y40/870-30U _K	40			595	30			2925	3420×1400×1250	2750			
X _W Y50/870-30U _K	50			748	38			3318	4260×1400×1250	3290			
X _W Y60/870-30U _K	60			902	46			3712	4700×1400×1250	3730			
X _W Y70/870-30U _K	70			1056	54			4106	5140×1400×1250	4170			
X _W Y80/870-30U _K	80			1210	62			4561	5580×1400×1250	4610			

法兰尺寸表

FLANGE SIZE


型号 TYPE	D	D1	D2	n-M	D	D1	D1	n-M
450	150	110	40	4-Φ18	115	85	32	4-Φ14
630	185	145	56	4-Φ18	115	85	45	4-Φ14
800	185	145	56	4-Φ18	165	125	40	4-Φ18

型号 TYPE	D	D1	D2	n-M	D	D1	D1	n-M
1000	185	145	69	4-Φ18	160	130	60	4-Φ14
1250	240	170	85	4-Φ18	190	150	63	4-Φ18
1500	285	240	156	8-Φ23	190	150	63	4-Φ18



液压自动保压厢式压滤机

Hydraulic Filter Press

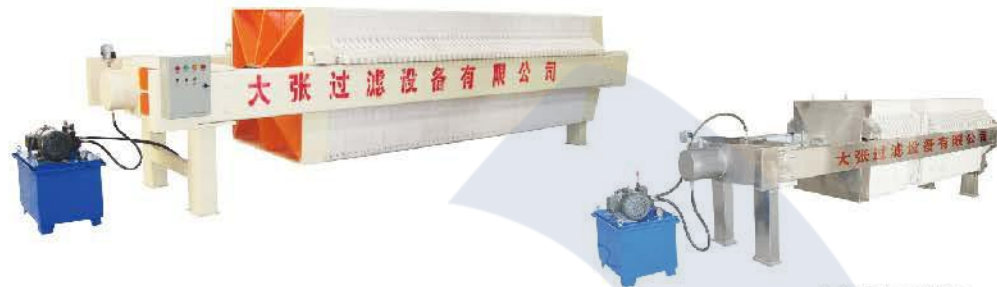

机架包覆不锈钢
S.S.304 Coating

结构特点

Design Feature

采用电接点压力表实现自动保压，操作方便、运行稳定、结构可靠，适用于过滤面积中等的压滤机。

由于是手动拉板，适用于工作频率不高，滤板数量不多的压滤机。

Hydraulic filter press use electrical-contact pressure meter to realize pressure keeping, so it is features of easy operation, stable performance, but the cakes are discharged manually. So it suitable for the filter press which filtering area is not too big and have no too much plates.

技术参数

TECHNICAL DATA

规格型号 Model	过滤面积(m²) Filter area	滤板尺寸(mm) Plate size	滤饼厚度(mm) Cake thickness	滤室容积(L) Filter chamber volume	滤板数量(pcs) Plate NO.	过滤压力(Mpa) Filtration pressure	电机功率(Kw) Motor Power	整机质量(Kg) Weight	外形尺寸长×宽×高(mm) Dimensions L×W×H(mm)	地基尺寸(mm) Foundation Size(mm)			
										L	B	D	H
X [△] _M Y50/1000-30U ^B _K	50	1000×1000	30	736	28	≥0.6	4.0	4072	4040×1500×1360	3120	780	1400	870
X [△] _M Y60/1000-30U ^B _K	60			889	34			4468	4460×1500×1360	3480			
X [△] _M Y70/1000-30U ^B _K	70			1011	40			4863	4760×1500×1360	3840			
X [△] _M Y80/1000-30U ^B _K	80			1193	46			5259	5120×1500×1360	4200			
X [△] _M Y100/1000-30U ^B _K	100			1473	57			5985	5800×1500×1360	4860			
X [△] _M Y120/1000-30U ^B _K	120			1777	69			6776	6500×1500×1360	5580			
X [△] _M Y100/1250-30U ^B _K	100	1250×1250		1468	36	≥0.6	4.0	6728	5020×1770×1600	3970	850	1770	995
X [△] _M Y120/1250-30U ^B _K	120			1746	43			7512	5470×1770×1600	4430			
X [△] _M Y140/1250-30U ^B _K	140			2063	51			8641	5990×1770×1600	4950			
X [△] _M Y160/1250-30U ^B _K	160			2341	58			8205	6450×1770×1600	5400			
X [△] _M Y180/1250-30U ^B _K	180			2619	65			10044	6905×1770×1600	5860			
X [△] _M Y200/1250-30U ^B _K	200			2896	72			10851	7360×1770×1600	6300			
X [△] _M Y220/1250-30U ^B _K	220			3214	80			11765	7880×1770×1600	6830			
X [△] _M Y250/1250-30U ^B _K	250			3650	91			12834	8600×1770×1600	7550			
X [△] _M Y200/1500-35U ^B _K	200	1500×1500		3498	49	≥0.6	11	19530	6400×2200×1900	5250	1170	1900	1070
X [△] _M Y250/1500-35U ^B _K	250			4375	61			22478	7225×2200×1900	6090			
X [△] _M Y300/1500-35U ^B _K	300			5235	74			25526	8130×2200×1900	6990			
X [△] _M Y350/1500-35U ^B _K	350			6125	86			28720	8940×2200×1900	7840			
X [△] _M Y400/1500-35U ^B _K	400			6985	99			32074	9880×2200×1900	8750			
X [△] _M Y450/1500-35U ^B _K	450			7875	111			35086	10690×2200×1900	9590			
X [△] _M Y500/1500-35U ^B _K	500			8735	123			38106	11560×2200×1900	10430			